

DATA SHEET

EASYCONNECT EC-P

CABLE MANAGEMENT BOX



The EasyConnect EC-P tabletop cable management solution is designed to provide easy connectivity for conference room users. The sleek box mounts into the table, neatly storing Ethernet, HDMI, and USB cables for easy access. The EC-P series includes two AC power receptacles, and is easily customized to fit your needs, adding efficiency and style to any meeting space.

FEATURES

- Sleek low-profile design complements any office environment
- Sliding cover with cable pass-through
- 5 foot (1.5 m) cables pull out and retract easily for storage
- Cables included: 2x Cat5e Ethernet, USB 2.0 Type-A, HDMI 1.4
- Choice of AC mains power receptacle
- Covered by Biamp Systems five-year warranty


ARCHITECTS & ENGINEERS SPECIFICATIONS

The cable management solution shall be installed into the top of a table. The cable management solution shall be equipped with the following types and quantities of cables: one HDMI cable, one VGA cable, one 3.5 mm audio cable, one USB 2.0 Type A cable, and two Category 5 cables. The cables shall be 6 feet (1.7m) in length and shall be retractable. The cable management solution shall support the following types of AC power connections: EU (Europe), Universal, CH (Switzerland), and DK (Denmark). The cable management solution shall support one or two AC power connections. Any combination of AC power connection types shall be supported for the two connection variant. The cable management solution shall support the following control pads in the one connection variant: Impera Sierra II, Impera Echo, Impera Echo Plus, and Impera Oscar. The cable management solution shall support 12V DC direct output power. Warranty shall be five years. The cable management solution shall be Biamp® EasyConnect.

EASYCONNECT SPECIFICATIONS

Top Plate Dimensions		Environmental	
Width:	9.9 inches (251 mm)	Ambient Operating Temperature Range:	32 - 86° F (0 - 30° C)
Depth:	5.3 inches (135 mm)	Humidity:	10-90% relative humidity (non-condensing)
Overall Dimensions		Altitude:	0-6,600 ft (0-2000m) MSL
Height:	4 inches (102 mm)	Compliance:	
Width:	8.6 inches (218 mm)		
Depth:	3.5 inches (89 mm)		
Weight:	5.5 lbs (2.5 kg)	CE Marked (Europe)	
		RoHS Directive (Europe)	

INCLUDED CABLES

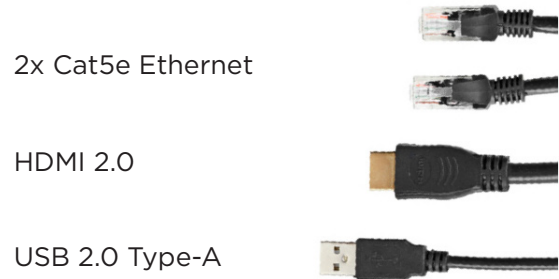

EASYCONNECT MODELS

- EC-P-CH
- EC-P-DK
- EC-P-EU
- EC-P-US
- EC-P-UNI


POWER CONNECTOR OPTIONS



EU socket



Universal socket*



DK socket



CH socket



US socket

* The Universal (UNI) receptacle provided with this product may not comply with your local safety installation regulations. Therefore, you should verify with your local authorities that this UNI receptacle complies with your local requirements prior to installation and use.

Biamp and Impera are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.