


# DYNASOUND® DS2500

## WINDOW, DOOR, WALL MASKER FOR SCIF / SECURE ROOM

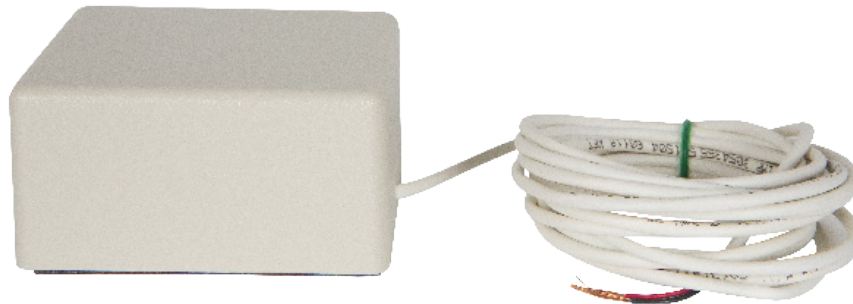

The Dynasound DS2500 series sound maskers are used to protect windows, walls and doors against human and electronic eavesdropping by applying full bandwidth sound masking. The unit may be attached to the interior side of any window, door or in some cases wall surfaces. In all applications the integrity of the surface remains intact. The DS2500 series is critical to the securing of windows, doors and walls when DIAM and DCID requirements for SCIF need to be met. It is effective against laser eavesdropping techniques, as well as the use of parabolic microphones. When controlled by Dynasound's DS102 Series security generators and amplifiers, it also protects against sophisticated signal recovery techniques designed to capture conversations buried within the sound masking signal.

## FEATURES

- Protects windows, doors, and walls against human and electronic eavesdropping techniques
- Designed for 70.7 volt systems
- Does not require separate transformer
- Available with or without rotary switch
- Lightweight and easy to install
- UV rated adhesive mount
- Accepts a mix of sound masking, music, and misinformation signals
- Met Works with WELL licensing criteria for sound masking

## ARCHITECTS & ENGINEERS SPECIFICATIONS

Sound masking assembly shall be Dynasound model DS2500. Unit shall contain a acoustical driver, equipped with a 70.7V transformer, and be designed for peel-and-stick installation on to window and door surfaces. The unit shall be factory assembled, wired and ready for installation. Optionally an external tap selector switch with an off position and 1/8, 1/4, 1/2, 1, 2 and 4 watt power taps. Optional retractable cord shall be used for door applications. The enclosure shall measure 3 inches by 2 7/16 inches by 1 9/16 inches tall. Units without retractable cord shall be supplied with 12' leads consisting of two conductor copper stranded wire. Similar devices requiring external transformers are not acceptable. Devices not designed for use on 70.7 volt systems are not acceptable.

DYNASOUND DS2500 SPECIFICATIONS

|                     |                                                                                |                           |                       |
|---------------------|--------------------------------------------------------------------------------|---------------------------|-----------------------|
| <b>Driver:</b>      | Non-conventional security type                                                 | <b>Overall Dimensions</b> |                       |
| <b>Transformer:</b> | Primary 70.7v, Secondary 8 Ohms,<br>Switch Positions: 1/8,1/4, 1/2,1,2,4 watts | <b>Height:</b>            | 1 3/4 inch (44.45 mm) |
|                     |                                                                                | <b>Width:</b>             | 5 inches (127 mm)     |
|                     |                                                                                | <b>Depth:</b>             | 5 inches (127 mm)     |
|                     |                                                                                | <b>Weight:</b>            | 2 lbs (0.907 kg)      |
|                     |                                                                                | <b>Finish:</b>            | Black                 |

Biamp strives to improve its products on a continual basis. Specifications are therefore subject to change without notice.

MODELS:

- DS2500 – Base model
- DS2520 – With retractable cord
- DS2510 – With volume control
- DS2530 – With vol. control and retractable cord

USE WITH:



DS1042 System



DS1092 System



DS1625 Amplifier



DS1628 Amplifier

Biamp, Cambridge, and Dynasound are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.