

CM3T

3" dual cone loudspeaker, white



The CM3T is a stylish small ceiling mount 70 V/100 V ceiling mount loudspeaker. Thanks to its halogen-spot size, it can be integrated into any interior style. It is ideal for speech and background music in quiet areas, toilets, cloakrooms, and more.

The speaker has a full metal frame and a coated dual paper cone for the lowest distortion and increased resistance against moisture.

The CM3T is easy to install thanks to its simple, quick mounting system (2 spring clamps).

The versatile CM3T ceiling mount speaker allows low-impedance (16 Ω) or 70 V/100 V connections. The removable grille logo and clear wiring decal make installations clean and efficient.

The CM3T loudspeakers can be painted in any colour.


TECHNICAL SPECIFICATIONS

outside diameter	105 mm	installation grip range	1 mm - 15 mm
cutout	85 mm	woofer size	3 in
loudspeaker system	dual cone	mounting system	2 springs
woofer cone material	coated paper	70 V transformer power taps	6 W - 3 W - 1.5 W - 0.75 W
colour	white / black	100 V transformer power taps	6 W - 3 W - 1.5 W
SPL 1 W@1 m	87 dB	impedance	16 Ω
frequency response	120 Hz - 18 kHz	low impedance continuous power	10 W
grille main material	aluminium	max SPL@1 m	99 dB
applicable low impedance	yes	main construction material	steel
vertical dispersion angle 1000 Hz	180°	IP rating	50
net weight product	0.35 kg	applicable in 70 V/100 V	yes
depth	74 mm	closest RAL colour (subject to deviations)	RAL9010 (W) / RAL9011 (BL)

POLAR PLOTS


Data Shown: CM3T (Apart Audio)
Display Parameters: Frequency: 1000Hz (1/24th Octave)

Horizontal
Vertical

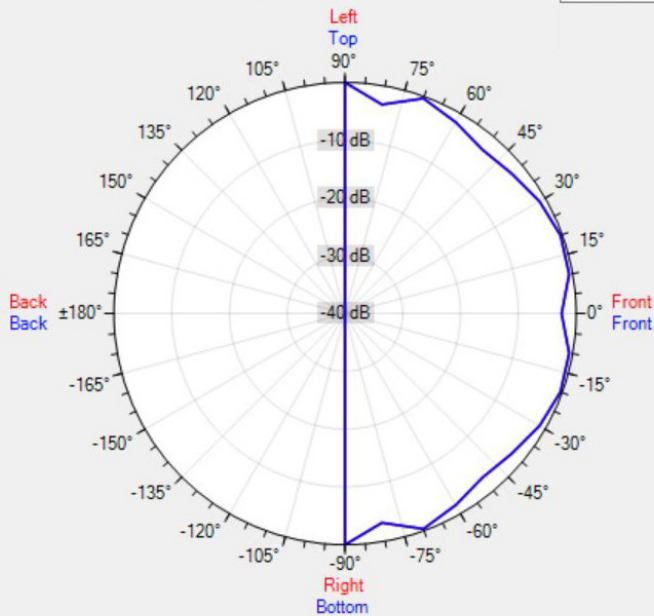


Data Shown: CM3T (Apart Audio)
Display Parameters: Frequency: 2000Hz (1/24th Octave)

Horizontal
Vertical

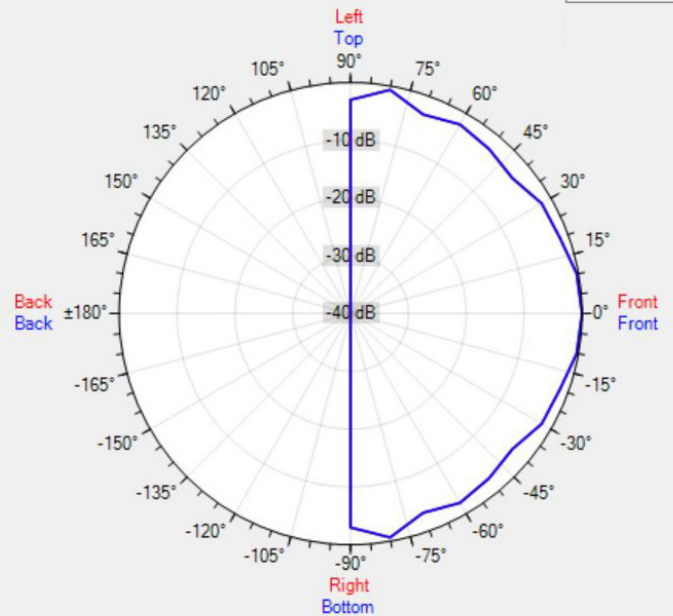

Data Shown: CM3T (Apart Audio)
Display Parameters: Frequency: 4000Hz (1/24th Octave)

Horizontal
Vertical

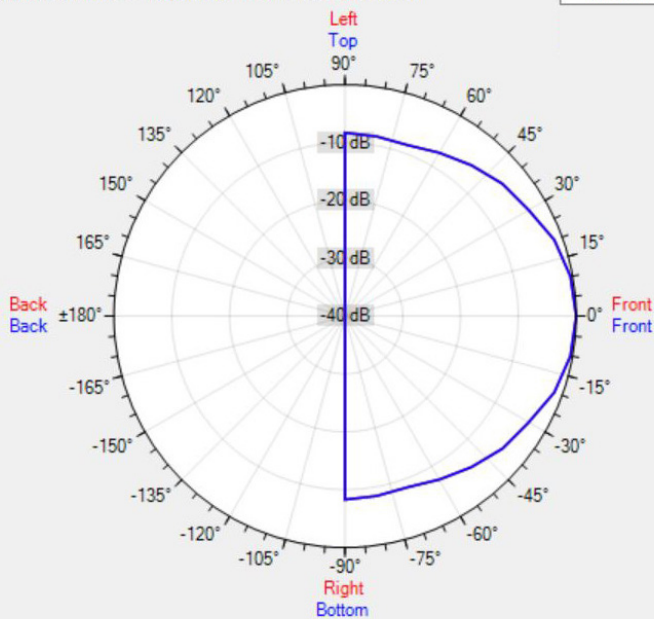

Data Shown: CM3T (Apart Audio)
Display Parameters: Frequency: 8000Hz (1/24th Octave)

Horizontal
Vertical

